


**ELEVATION**

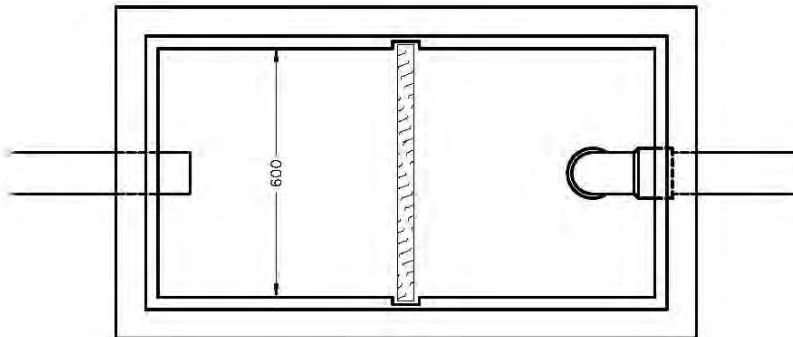

**PLAN**

**INTERCEPTOR SIZES**

MAX. AREA OF PARKING (PAVED) (sq. m)	PIPE SIZE (mm) (OUTLET)	GREASE INTERCEPTOR		
		LENGTH (mm)	WIDTH (mm)	LIQUID DEPTH (mm)
650	100	1200	600	600
1858	150	1372	600	600
3995	200	1524	762	600
7246	250	1676	762	600
11613	300	1829	762	600
21367	375	1981	914	600

**NOTE:** WALL AND BOTTOM OF THE INTERCEPTOR ARE TO BE OF CONCRETE 100mm THICK AND MADE WATER-TIGHT. WHEN DRAINAGE HOLES ARE INSTALLED IN THE BOILER PLATE COVER, PROVIDE A SLIGHT DOWNWARD SLOPE ON THE COVER TO THE INLET END. ALL DIMENSIONS SHOWN IN mm UNLESS OTHERWISE NOTED.

				THE CORPORATION OF DELTA ENGINEERING DEPARTMENT			DSN.	DRN.	DWG. No.	
							CHKD.	APVRD.	L 1775A	
DATE				TYPICAL OIL INTERCEPTOR FOR PAVED PARKING AREAS (TYPE 1)		SCALE	N.T.S.			
						REVISION	No.	BY	DATE	2014-03-13
REVISIONS										